





LC..QA type logic element - 3 way

- Venting to close configuration
- Fixed or adjustable stand-by
- Screw type adjustable configuration with lead sealing option
- SAE10 and SAE16 cavities

Technical specifications and diagrams are measured with mineral oil of 46 cSt viscosity at 40°C (104°F) temperature.

		LC10QA	LC16QA
Nominal flow		80 l/min (21 US gpm)	190 l/min (50 US gpm)
Max. pressure		350 bar (5100 psi)	
Opening pressure		fixed setting: 5, 10 bar (72.5, 145 psi) adjustable setting: from 8 to 15 bar (116 to 218 psi)	
Oil leakage	at 210 bar (3050 psi)	80 cm³/min (4.88 in³/min)	230 cm³/min (14.03 in³/min)
Fluid		mineral based or synthetic hydraulic fluid with lubricating properties	
Viscosity		10–200 cSt	
Max level of contamination		20/18/14 ISO4406	
Fluid temperature	with NBR seals+Polyurethane with FPM seals	from –25°C (–13°F) to 90°C (194°F) from –20°C (–4°F) to 110°C (230°F)	
Environmental temp. for working conditions		from –20°C (–4°F) to 60°C (140°F)	
Cavity		SAE 10/3Q	SAE 16/3Q
Weight		0.15 kg (0.33 lb)	0.45 kg (0.99 lb)


NOTE - For different conditions, please contact Walvoil Sales Dpt.

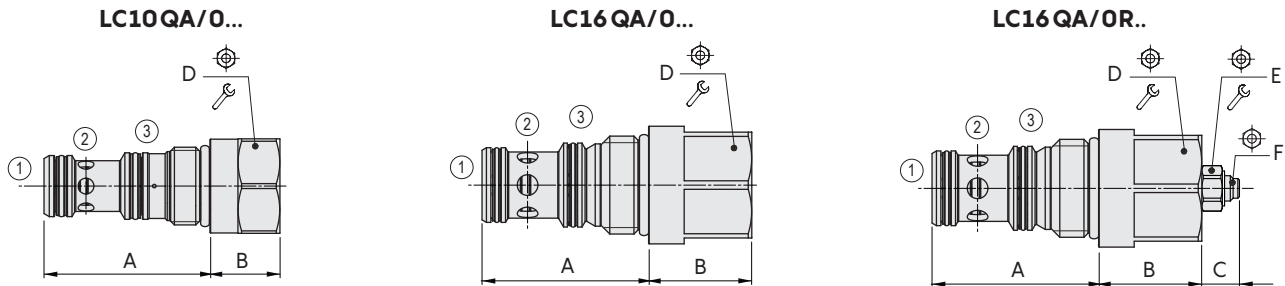

Valve type	A		B		C (max)		D		E		F	
	mm	in	mm	in	mm	in	Nm	lbft	Nm	lbft	Nm	lbft
LC10QA	47.4	1.87	20	0.79	-	-	27	70	52	-	-	-
LC16QA	56.9	2.24	35.1	1.38	24	0.94	36	100	74	13	9.8	7.2

Ordering codes and description composition

LC10QA/0 B 0 B SB=12bar

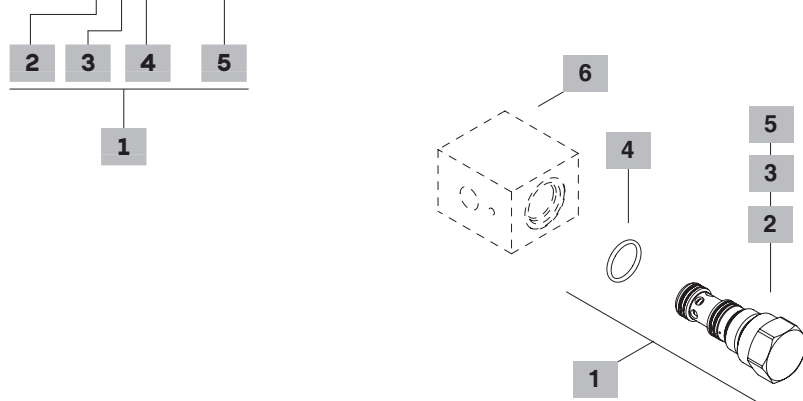

1 Cartridges

TYPE	CODE	DESCRIPTION
SAE cavity 10/3Q		
LC10QA/0B0B	OLC10Q002001	Fixed setting, 5 bar (72.5 psi)
LC10QA/0C0B	OLC10Q002002	Fixed setting, 10 bar (145 psi)
SAE cavity 16/3Q		
LC16QA/0B0B	OLC16Q002001	Fixed setting, 5 bar (72.5 psi)
LC16QA/0R0B	OLC16Q002003	Adjustable setting, 12 bar (174 psi)

2 Stand by

Setting is referred to 1 l/min (0.26 US gpm) flow

TYPE	DESCRIPTION
B	Fixed setting: 5 bar (72.5 psi)
C	Fixed setting: 10 bar (145 psi)
R	Adjustable setting: from 8 to 15 bar (116 to 218 psi)

3 Load sensing

TYPE	DESCRIPTION
0	Without sealing
X	With sealing: for valves with adjustable stand-by only

4 Seals

TYPE	DESCRIPTION
B	NBR (Buna)+Polyurethane o-ring seals, std configuration
V	FPM (Viton) o-ring seals, contact Sales Dept

5 Stand-by setting

To be specified only with adjustable stand-by valve


6 Valve body

TYPE	CODE	DESCRIPTION
SAE10/3Q-G 1/2	3CC1032D21	Steel body for cavity 08 valve, G 1/2 std thread
SAE16/3Q-G 3/4	3CC1632E21	Steel body for cavity 16 valve, G 3/4 std thread

For aluminium bodies or different threading see from page 210

Rating diagrams

LC10QA pressure drop
(fully open)

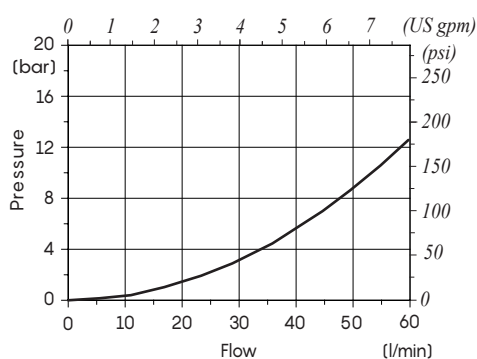

LC16QA pressure drop
(fully open)

